



PYLONTECH



**Lithium-Ion Phosphate Energy Storage
System**

Force-H1 Specifications

2. System Introduce

2.1 Product Introduce

Force-H1 is a high voltage battery storage system based on lithium iron phosphate battery, which is one of the new energy storage products developed and produced by Pylontech. It can be used to support reliable power for various types of equipment and systems. Force-H1 is especially suitable for those application scenes which required high power output, limited installation space, restricted load-bearing and long cycle life.


2.2 Specifications



2.2.1 The parameter of system

Product Type	Force-H1				
Cell Technology	Li-iron (LFP)				
System Model Name	Force-H1-48/144V	Force-H1-48/192V	Force-H1-48/240V	Force-H1-48/288V	Force-H1-48/336V
Battery System Capacity(kWh)	10.65	14.20	17.76	21.31	24.86
Battery System Usable Capacity(kWh)	9.59	12.78	15.94	19.18	22.37
Battery System Voltage(Vdc)	144	192	240	288	336
Battery System Capacity(AH)	74Ah				
Battery Controller Name	FC0500-40S				
Battery Module Name	FH48074				
Battery Module Quantity(pcs)	3	4	5	6	7
Battery Module Capacity(kWh)	3.552				
Battery Module Voltage(Vdc)	48				
Battery Module Capacity(AH)	74				
Battery System Charge Upper-Voltage(Vdc)	162	216	270	324	378
Charge/Discharge Current(Amps, Standard)	14.8				
Charge/Discharge Current(Amps, Normal)	37				
Charge/Discharge Current(Amps, Max.@15s)	40				
Battery System Discharge lower-Voltage(Vdc)	130.5	174	217.5	261	304.5
Battery System DC Rate Power (kW)	5.33	7.10	8.88	10.66	12.43
Battery System DC Max.Power(kW.@15s)	5.76	7.68	9.60	11.52	13.44
Short circuit rating(Amps)	< 4000				
Efficiency(%)	96				
Depth of Discharge(%)	90				
Dimension(W*D*H,mm)	600*380*700	600*380*870	600*380*1040	600*380*1210	600*380*1380
Communication	CANBUS/Modbus RTU				
Protection Class	IP55				
Weight (kg)	122	158	194	230	266
Operation Life(Years)	15+				
Operation Temperature(°C)	0~50°C				
Storage Temperature(°C)	-20~60°C				
Humidity	5~95%				
Product Certificate	VDE 2510-50, IEC 62619, UL 1973, IEC 62477-1, IEC 62040-1, CE, UN 38.3				
Warranty	10 Years				
1) Battery Controller Dimensions(W*D*H)	600x380x150mm				
2) Battery Module Dimensions (W*D*H)	600x380x170mm				
3) Battery bottom base Dimensions (W*D*H)	600x380x40mm				

2.2.2 Battery Module (FH48074)

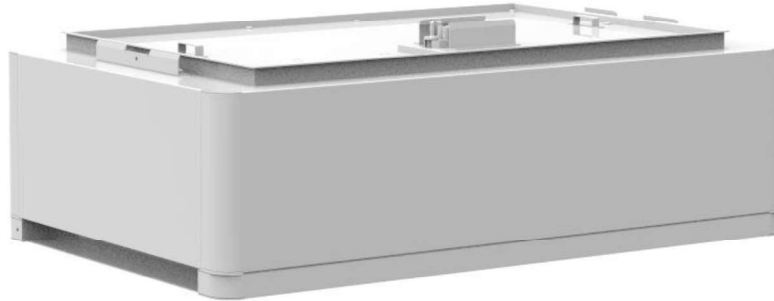

Product Type	FH48074
Cell Technology	Li-ion (LFP)
Battery Module Capacity (kWh)	3.552
Battery Module Voltage (Vdc)	48
Battery Module Capacity (Ah)	74
Battery Module Serial Cell Quantity (pcs)	15
Battery Cell Voltage (Vdc)	3.2
Battery Cell Capacity (AH)	37
Dimension (W*D*H, mm)	600*380*170
Weight (kg)	36
Operation Life	15+Years
Operation Cycle Life	5,000
Operation Temperature	0~50°C
Storage Temperature	-20~60°C
Transfer Certificate	UN38.3



PYLONTECH

Pylon Technologies Co., Ltd.

No. 73, Lane 887, ZuChongzhi Road, Zhangjiang Hi-Tech Park
Pudong, Shanghai 201203, China

T+86-21-51317699 | **F** +86-21-51317698

E service@pylontech.com.cn

W www.pylontech.com.cn